
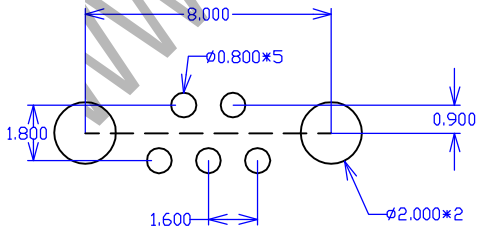

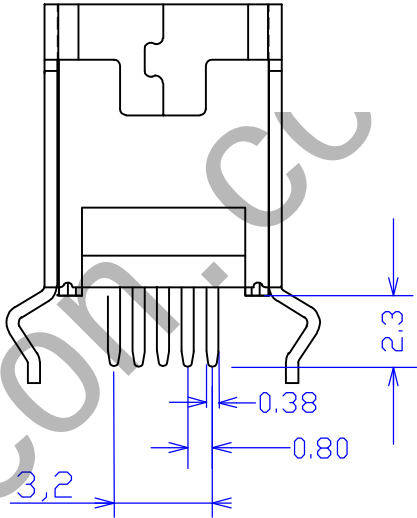
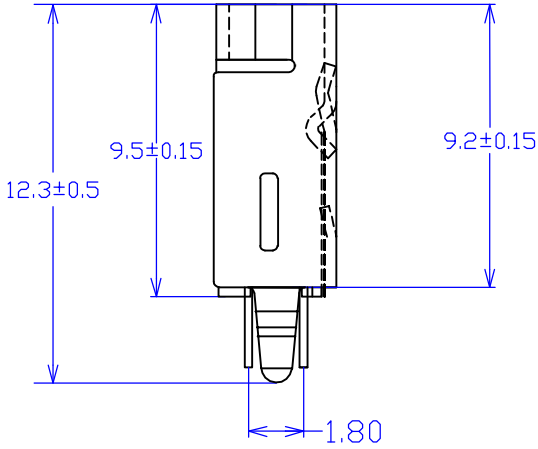


REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	08/03/06	
A/1	修改公差	12/09/28	

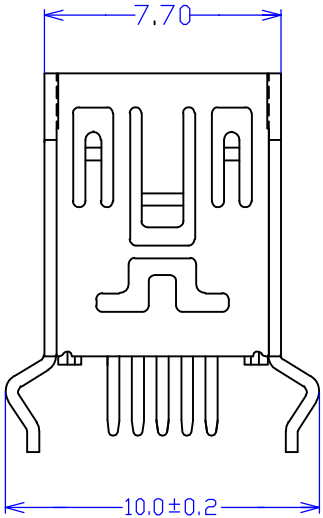

Recommended PCB Layout

特性: Specifications:
电器: Electrical:
Current rating: 1.0 A Max.
Voltage rating: 30V ac(rms) Max.
接触电阻: Contact Resistance
50millionhms Max
耐压: Dielectric Withstanding Voltage:
100V AC Sea Level
绝缘电阻: Insulation Resistance:
100 MEGA ohms MIN
*Mechanical Characteristics:
Mating Force:3.57kg Max.
Unmating Force: 0.7kg Min.
Terminal Is Pulled Force:1.0Kg Min
材料: Materials:
塑料:HOUSING:Hing Temperature
Thermoplastics.
LCP 耐高温塑胶
端子: Contact:Copper Alloy 铜合金
铜壳:Shell:Copper Alloy 铜合金
电镀:Finish:
端子Contact:Plated Gold IN Mating
Area:Tin On Slder Talls
接触点镀金, 脚镀锡
铜壳: Shell:Nickel/Plating 镀镍

[YYE] 东莞市源越电子有限公司			
公差: XX ±0.30 XXX ±0.20 XXXX ±0.10 X° ±3° X.X° ±2°	制图: <i>jerry</i>	日期: 2008.03.06	品名规格
	审核:	日期:	MINI USB 5P-180° 直插弯角 (RoHS)
 单位: mm 比例:1:1 纸张: A4	核准:	日期:	料號: YUMI2VCA05A
			图号: U-0012