

REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	2017/06/17	

NOTES:

MATERIAL :

- | | |
|--------------------|---|
| 1.HOUSING MATERIAL | :GLASS FILLED POLYESTER UL94V-0. |
| 2.CONTACT MATERIAL | :PHOSPHOR BRONZE $\phi 0.46\text{mm}$. |
| 3.PLATING | :GOLD PLATING OVER NICKEL. |

ELECTRICAL:




- | | |
|--------------------------------------|------------------------------|
| 1.VOLTAGE RATING | :125 VAC RMS. |
| 2.CURRENT RATING | :1.5 AMP. |
| 3.CONTACT RESISTANCE | :30 MILLIOHMS MAX. |
| 4.INSULATION RESISTANCE | :500 MEGOHMS MIN @ 500V DC . |
| 5.DIELECTRIC WITHSTANDING RESISTANCE | :1000V AC RMS 50Hz. 1MIN. |

MECHANICAL:



- | | |
|----------------------------|------------------|
| 1.DURRABILITY | :750 CYCLES MIN. |
| 2.PCB RETENTION PRE-SOLDER | :1 LB MIN. |

ENVIRONMENTAL:

- | | |
|--------------|----------------|
| 1. STORAGE | : -40℃~+85℃ |
| 2. OPERATION | : -40℃ TO 70℃. |

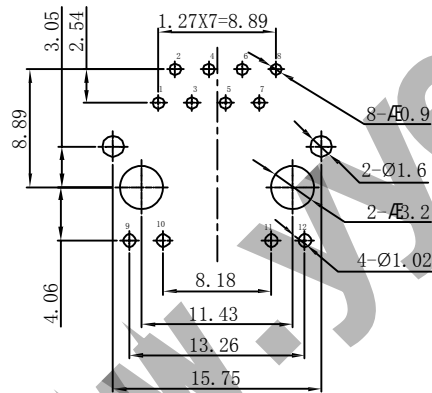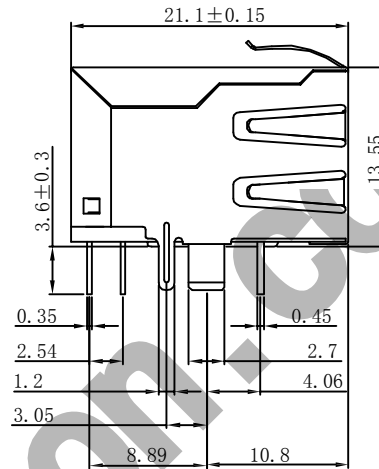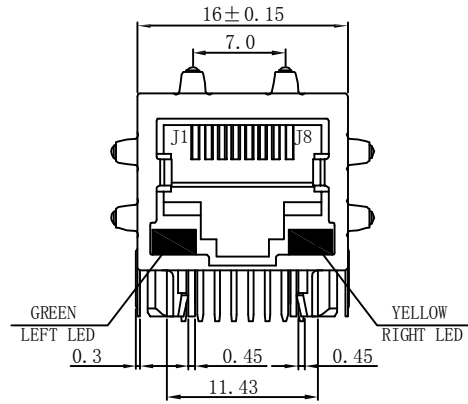

PC Board Layout



东莞市源越电子有限公司
DongGuan YuanYue Electronic CO.,LTD.
Web.: <http://www.yyecon.com>

公差: X. ±0.30 X.X ±0.20 X.XX ±0.10 X.* ±3° X.X* ±2°	制圖: 廖少波	日期: 2017/06/17	品名规格
单位: mm	确认:		RJ45 Modular Jack 1*1Tab-Down W/LEDs
比例:1:1 纸张: A4	核准:		料號: YRJ45FRL07-8P8C
			图号: RJ45-0087