




REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	2018/3/14	




TOP VIEW




LEFT SIDE VIEW

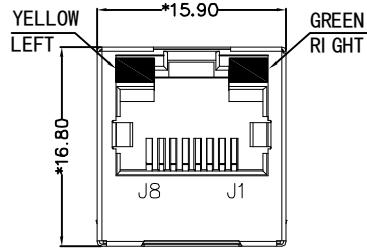


FRONT VIEW




RIGHT SIDE VIEW




BACK VIEW



BOTTOM VIEW



RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

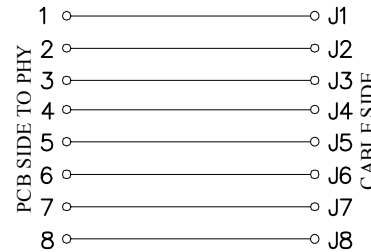

MATERIAL:

HOUSING: PA46,UL94V-0, BLACK.
 TERMINAL: PHOSPHOR BRONZE Ø=0.46MM, G/FU" GOLD PLATING.
 SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING ON ALL AREA.

MACHANICAL:


DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
 INSERTION FORCE: 2.2KG.F MAX.
 RETENTION STRENGTH: 7.7KG.F BETWEEN JACK AND PLUG.
 OPERATING TEMPERATURE: -40℃~+85℃.
 STORAGE TEMPERATURE: -40℃~+85℃.
 ALL CRITICAL DIMENSIONS WITH "**"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
 CURRENT RATING : 1.5AMP.
 DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ OR 60HZ,1 MIN.
 INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
 AFTER 500V DC FOR 1 MINUT
 CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
 INITIAL 50 MILLIOHMS MAX. AFTER DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8-2.8V
Yellow	585nm	20mA	1.8-2.8V

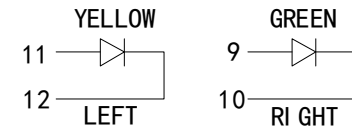

东莞市源越电子有限公司
 DongGuan YuanYue Electronic CO.,LTD.
 Web.:http://www.yyecon.com

公差: XX ±0.30 X.XX ±0.20 X.XXX ±0.10 X° ±3° X.X° ±2°	制圖:	LEESIN	日期: 2018/3/14	品名规格	
	确认:			RJ45 JACK 180° 8P8C	
单位: mm 比例:1:1 纸张: A4	核准:			料號: YRJ45FVL07-8P8C	
				图号:	RJ45-0082