




REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	2017/06/19	




TOP VIEW




LEFT SIDE VIEW

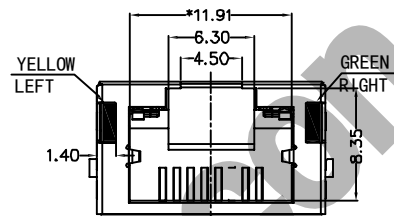


FRONT VIEW



RIGHT SIDE VIEW

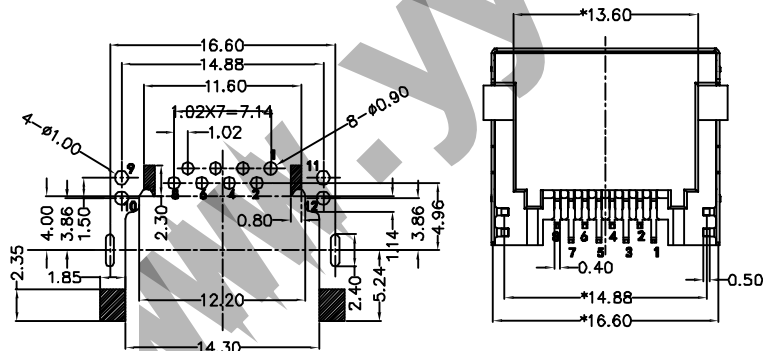

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE



BOTTOM VIEW

MATERIAL:

HOUSING: PCL,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM ,
0.6U" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20 MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:



DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40 ℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "*"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.85-2.45V
Yellow	585nm	20mA	1.7-2.2V

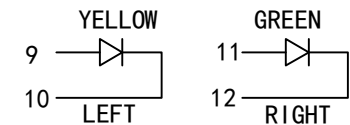

东莞市源越电子有限公司
DongGuan YuanYue Electronic CO.,LTD.
Web.: <http://www.yyecon.com>

公差: X. ±0.30 X.X ±0.20 X.XX ±0.10 X.* ±3° X.X* ±2°	制圖: 廖少波	日期: 2017/06/19	品名规格
單位: mm	核准:		RJ45 DIP 90° 沉板式7.0
比例:1:1	纸张: A4		料號: YRJ45FRLA7-8P8C
			图号: RJ45-0088