

REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	2019/06/12	

Materials:

Insulator: Black plastics (265C) UL94 V-0

Plunger: Brass Au 5U" over Ni

Barrel: Brass Au 5U" over Ni

Spring: SUS surface treatment

Mechanical:

Spring force: 90g+/-20g at 1.0mm working stroke


Full stroke: 1.40mm

Life test: 100,000 cycles

Electrical:

Rated current & voltage: DC12V; 1A Max

Contact resistance: 50 milliohm Max

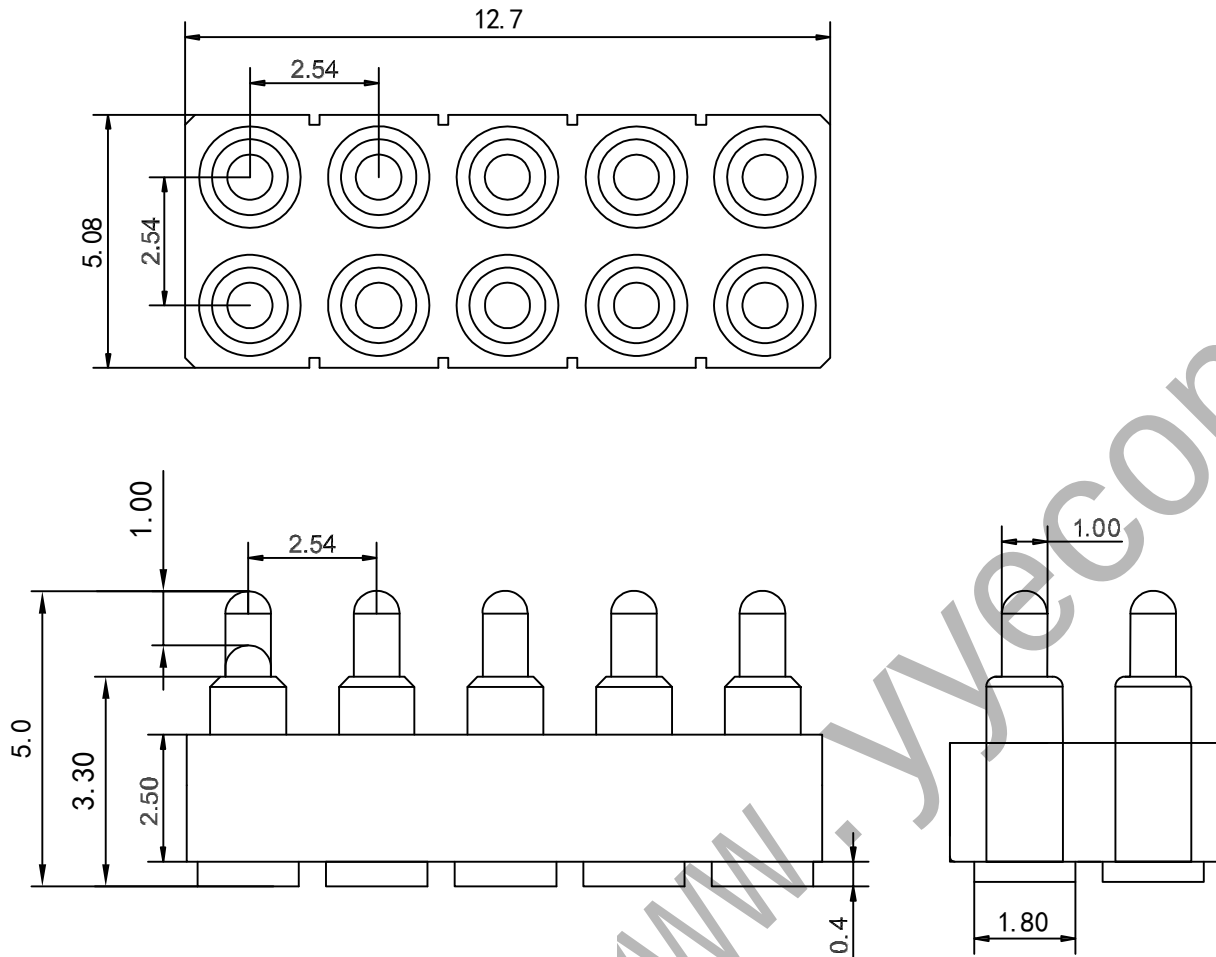

东莞市源越电子有限公司
DongGuan YuanYue Electronic CO.,LTD.


公差:

XX ±0.30

XXX ±0.20

XXXX ±0.10

X° ±3° X.X° ±2°



单位: mm

比例: 1:1 纸张: A4

制圖: 廖少波

确认:

核准:

日期:
2018/06/12

品名规格

2*5Pin 电池公座

料號: YPG254-250-10P-001

图号: PG-0042