


REV.	DESCRIPTION	DATE	CHANGER
A/0	原始版本	2018/03/25	

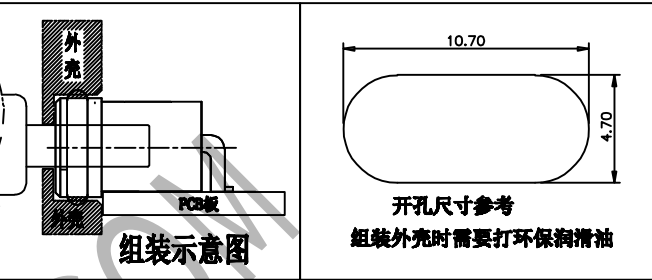

Contact Number	Signal Name	Remarks
1#	VBUS	Power
2#	D-	Date-
3#	D+	Date+
4#	ID	Reserve or Gound
5#	GND	Gound

⑦	Oval ring	1	Rubber	Black
⑥	Glue	1	---	Black
⑤	J-shaped frame	1	stainless Steel	Nickel plated
④	shell	1	stainless Steel	Nickel plated
③	Terminal	5	Copper alloy, 0.15t	Gold Plated On Contact Area
②	Insulator	1	PA9T	Black UL94V-0
①	Insulator	1	LCP	Black UL94V-0
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1.1. RATING: 1.8A (PIN1&5), 0.5A (PIN2&3&4);
- 1.2. CONTACT RESISTANCE: 30 mΩ MAX.(INITIAL);
- 1.3. DIELECTRIC WITHSTANDING: 500V AC MIN.;
- 1.4. INSULATION RESISTANCE: 1000MΩ MIN.;
2. DURABILITY: 10,000 CYCLES MIN.;
3. INSERTION FORCE: 3.5Kgf (35N) Max.;
4. EXTRACTION FORCE: 0.8Kgf (8N) Min.;
5. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8.
6. PLUG INTERFACE DIMENSIONS COMFORM TO USB2.0 SPEC.
7. PACKAGING: TAPE & REEL.

YUMCBF58S05 U C 9T B - G X

SHELL: U: SUS

TERMINAL: C: Copper Alloy

CORE 9T: PA9T
C: LCP






T: Tray
R: REEL

GOLD PLATED u":
G: Gold Flash
3: 3u" Gold
5: 5u" Gold
A: 10u" Gold
B: 15u" Gold
COLOUR: B: Black



东莞市源越电子有限公司
DongGuan YuanYue Electronic CO., LTD.
Web: <http://www.yyecon.com>

公差: XX ±0.30 XXX ±0.20 XXXX ±0.10 X* ±3° X* ±2°	制圖: 廖少波	日期: 2018/03/25	品名规格	
	确认:		Micro USB2.0 B-TYOE RECEPTACLE CUSTOMER DRAWING	
 单位: mm 比例: 1:1 纸张: A4	核准:		料號: YUMCBF58S05UC9TB-GX	
			图号:	MC-0029

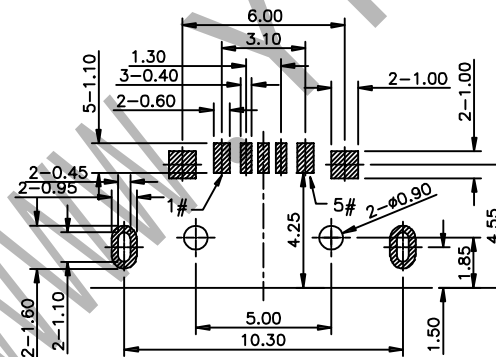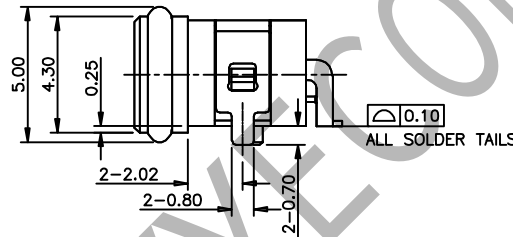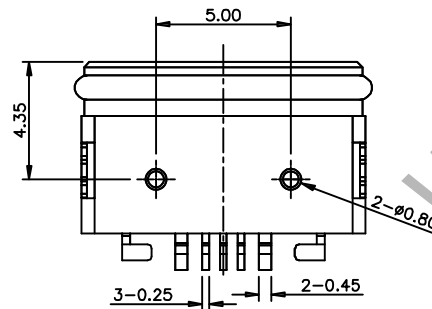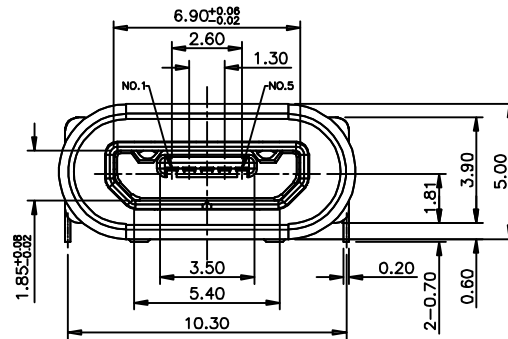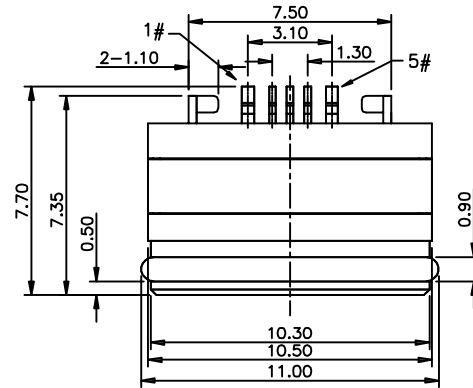

RECOMMENDED P.C.B. LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ±0.05